


RFID Low-profile Base-potted Emitter Antenna

RFID8516A SERIES



COMMON APPLICATIONS:



Fit in the car (pasted on the windshield surface, inside the instrument panel, in the trunk of the car, etc.) but should avoid to install on the metal body surface or in a small space surrounded by metal. The sensing distance varies depending on how well the car's internal shielding is

ELECTRICAL CHARACTERISTICS:

Part Number	Inductance (μH)	Test frequency (KHz)	Capacitance (nF)	Q
RFID8516A-1	500 ± 2%	125	3.3	125
RFID8516A-2	345 ± 2%	125	4.7	125
RFID8516A-3	161 ± 2%	125	10.0	125
RFID8516A-4	426 ± 2%	134.2	3.3	125
RFID8516A-5	300 ± 2%	134.2	4.7	125

TECHNICAL INFORMATION & PHYSICAL CHARACTERISTICS:

Dimensions(mm)

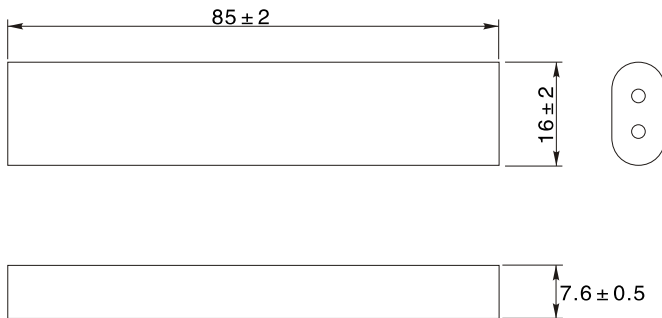

Wire: 2000mm ± 100mm

Note:

Resonant frequency: 125KHz ± 1.5% @ 25°C
 125KHz ± 3% @ -40°C to +85°C
 134.2KHz ± 1.5% @ 25°C
 134.2KHz ± 3% @ -40°C to +85°C

Induced current: 2.8A Max, Duty 30%

Operating temperature: -40°C to +85°C

Storage temperature: -40°C to +105°C

In addition to the above mass production parameters, can be customized according to customer requirements, including different induction frequency, wire length, terminal type, etc